

HIPPED Skylights



Our self supporting hipped skylights incorporate structural aluminium ridge, hip and cill members and are secured to a flat-topped structural upstand curb. The curb must be supplied at least 100mm wide to accommodate our cill member.

We manufacture to any size from 1500mm to 6000mm in width and the skylights can be supplied in any length required.

Our pivoted cill member is designed to allow the skylight to be pitched at any angle starting at 15° up to a maximum of

45° and our standard pitches are available at increments of 5° within the range. Pitches exceeding 45° can still be supplied, but will require a modified cill member for this to be achieved.



Our aluminium skylights are available in our Skyline and Skyline Box glazing systems and can be supplied in double glazed and single glazed options.

On larger skylights we install stainless steel tension wires at the curb positions at approximately three metre intervals along


the ridge line to prevent the horizontal loadings being transferred to the builders curb.

All our Skylights are fully assembled in our factory during manufacture to ensure a perfect fit with no site cutting necessary..

**Section through Hipped Skylight
Scale 1:4**

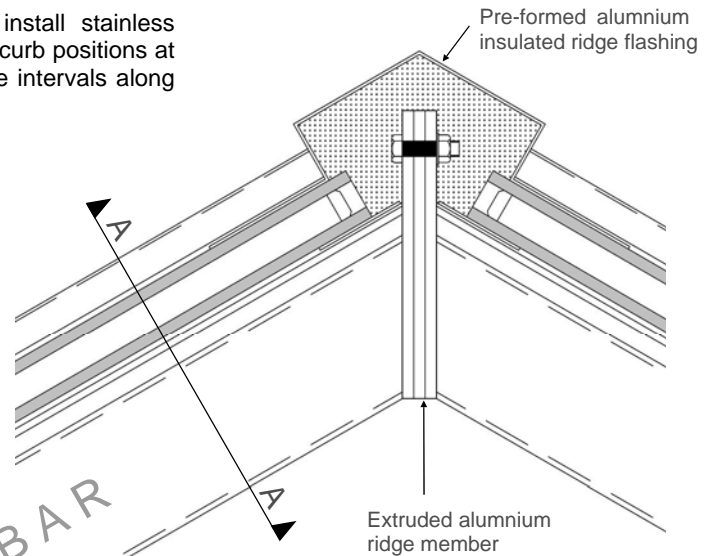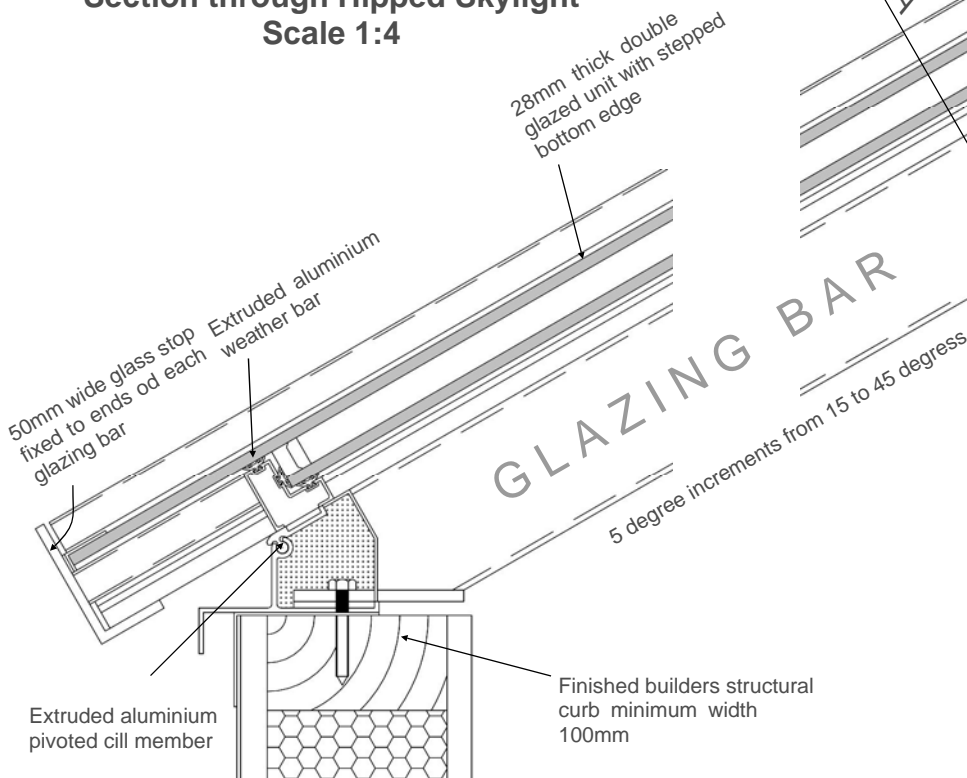

NOTE: Hip section through is similar to ridge detail

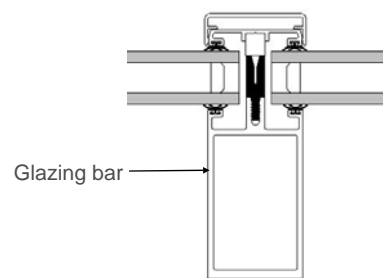

Section A-A